
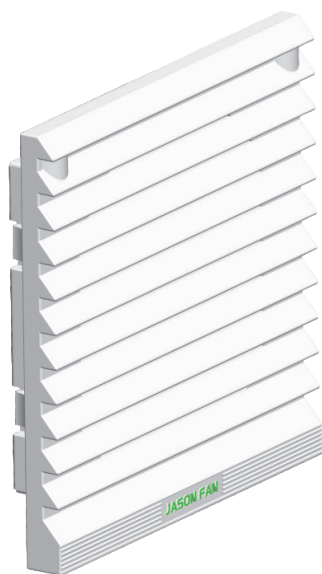


Exhaust filter series

Optional parts
排氣通風格柵系列
可選件

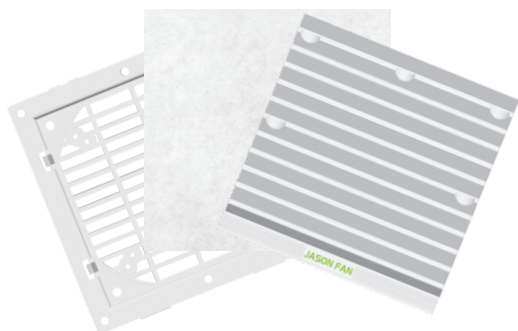


Characteristics

- Frame material uses anti-flame and heat resisting ABS plastic, of which fire resistance are accord with UL-94 Vo standard.
- Installation without screws are accord with standard of VDE 0113(EN 60204)
- Optional equips polyester fiber filter pad of 100g/m².150g/m².350g/m², built-in standard is 150g/m².Standard max static pressure 86Pa~62Pa max relative humidity 90%.
- Temperature range : (unconcretionary) -20°C~+65°C (store temperature) -20°C~+70°C
- 外框材料選用耐熱阻燃ABS塑料，其耐火性符合UL-94 Vo標準。
- 安裝符合VDE 0113(EN 60204)標準的無螺絲的門裝方式。
- 可配有聚酯纖維過濾墊100g/m².150g/m².350g/m².內置標準為150g/m² 標準最大靜態壓86Pa~62Pa 最大相對濕度90%
- 溫度範圍：（非凝結狀態）-20°C~+65°C（儲存溫度）-20°C~+70°C

Outline Dimensions

Units: mm

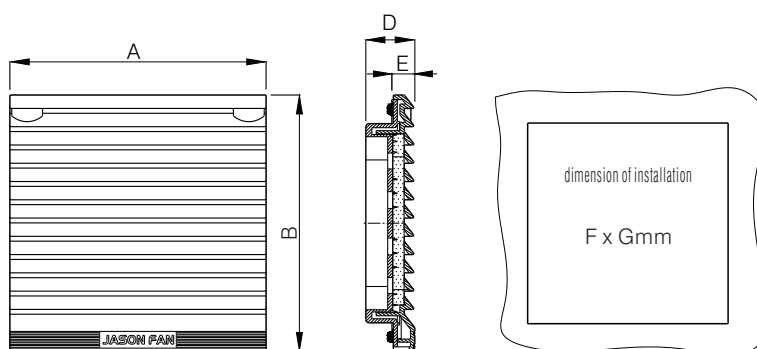


Type 產品型號 RAL 7035	External dimensions 外形尺寸				Opening size 安裝尺寸		IP	Filter pad 過濾墊		Related Info page 相關信息頁
	A	B	D	E	F	G		level	Size	
JK 6620	106.5	106.5	22	10	82.5	82.5	54	G2	75x75	91/92
JK 6621	116.5	116.5	22	10	93	93	54	G2	85x85	93/94
JK 6622	148.5	148.5	27.5	10	122.5	122.5	54	G2	115x115	95/96
JK 6623	204.5	204.5	30	13.5	176	176	54	G2	170x170	97/98
JK 6625	255	255	30.5	13.5	222	222	54	G2	215x215	99/100
JK 6626	324	324	30.5	13.5	290	290	54	G2	285x285	101/102
JK 6626D	324	324	30.5	13.5	290	290	54	G2	288x288	103/104




Ventilation shutter
Built-in black filter sponge
Finger guard for axial fan

通風格柵
內置黑色過濾海綿
用于軸流風扇的防護罩

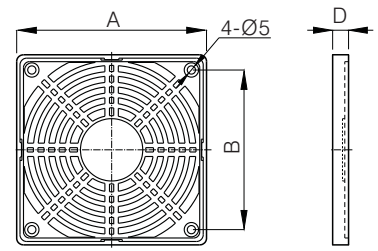


Type 產品型號	External dimensions 外形尺寸		
	A	B	D
LP 4008	8.6	71.5	10
LP 4009	9.6	82	10
LP 4012	115	104.8	10.5

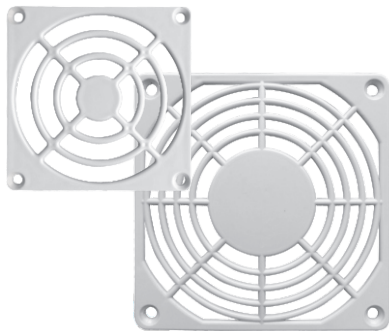


ABS plastic guard
Color RAL 7035

ABS塑料防護罩
顏色 RAL 7035

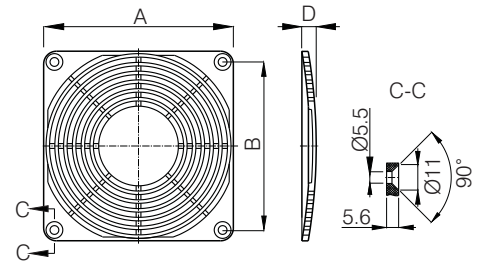


Type 產品型號	External dimensions 外形尺寸		
	A	B	D
LP 4208	80	71.5	7
LP 4209	92	82	7
LP 4212	120	104.8	6.5

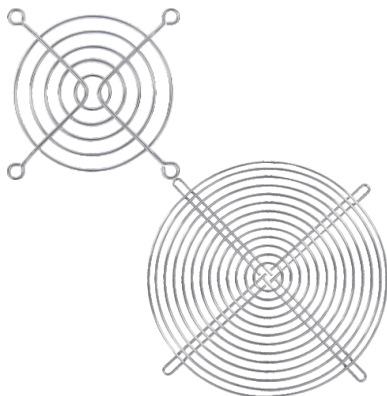

Metal guard
Surface nickel plating
Better corrosion resistance

金屬防護罩
表面鍍鎳處理
更高耐腐蝕

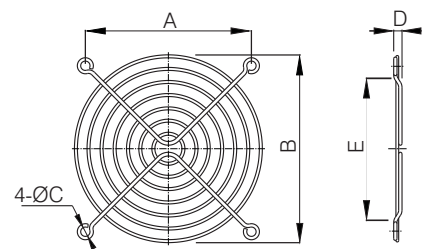

Type 產品型號	External dimensions 外形尺寸				
	A	B	C	D	E
LP 2204	32	29.5	4.5	4.5	35
LP 2206	50	53	5	5	57
LP 2208	71.5	73	5.3	5	85
LP 2209	82	87	5.3	5.4	102
LP 2212	104.8	115.5	5.5	5.4	133
LP 2215	114.5	140	5.5	5.4	152
LP 2222	170	215.5	5.5	9.5	209
LP 2225	208.6	268	6.6	11.5	257